




Unmodified Asphalt

AMIBIND™ unmodified asphalt is a performance-grade (PG) binder often used for hot mix asphalt production. As a neat asphalt, (containing no polymer modifiers) it provides a reliable balance of stiffness and flexibility, making it ideal for a wide range of paving applications. AMIBIND binders are engineered to resist rutting at high temperatures and cracking at low ones, delivering consistency, quality and performance.

Quick Facts

- Designed for hot mix production
- Improves durability
- Cost effective option
- Withstands heavy traffic
- Versatile applications
- Enables efficient paving
- Performs reliably in a wide range of climates
- Compatible with reclaimed asphalt pavement (RAP)

MORE AMI PRODUCTS

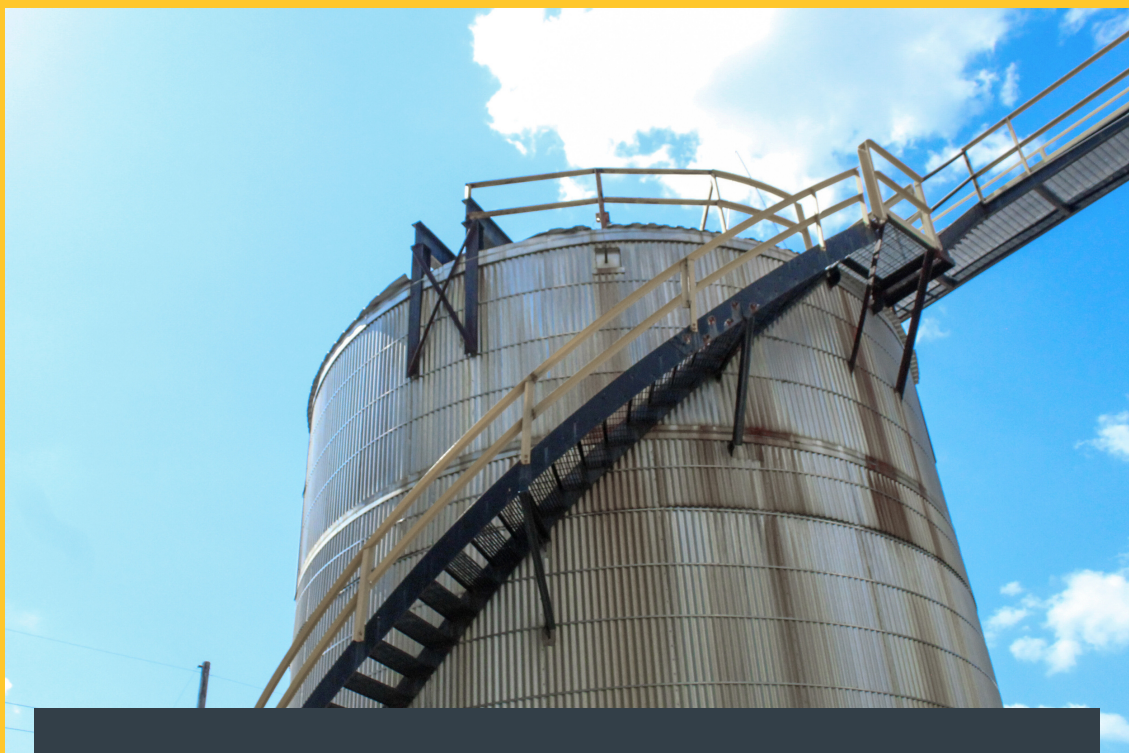

Frequently Asked Questions

Why choose AMIBIND™ for hot mix applications?

AMIBIND unmodified asphalt is a neat, performance-graded asphalt binder selected to meet your project's unique climate and traffic needs, ensuring the right balance of stiffness and flexibility. When combined with a carefully selected aggregate blend in a laboratory-designed mix, AMIBIND becomes the foundation of durable, cost-effective HMA suitable for highways, parking lots or municipal roads.

How does Asphalt Materials support customers using AMIBIND™ in the field?

In our experience, the most successful projects have a combination of quality products, trusted relationships and a team eager to be your boots on the ground. AMI provides hands-on support from experienced field teams who assist with mix design, troubleshooting and performance optimization ensuring every project gets the attention it deserves.